
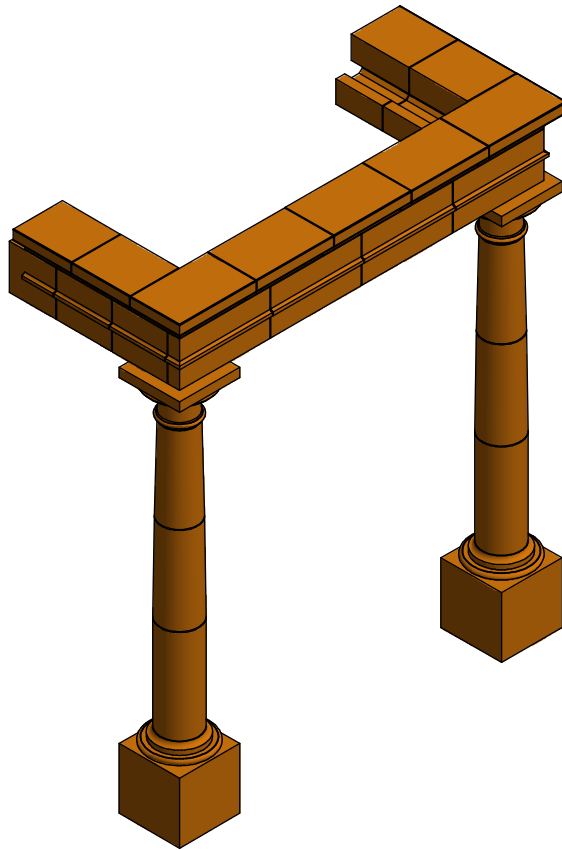
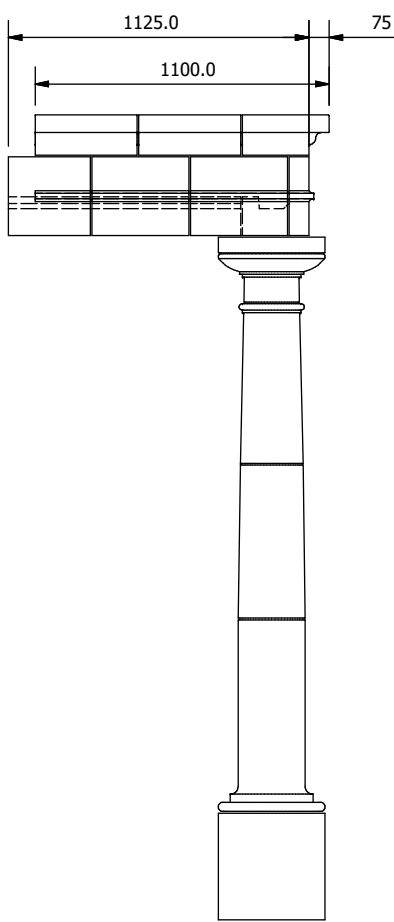


Ring beam to be cast from RC35 concrete using 10mm aggregate.
 Suitable foundations to be designed and supplied by others.
 Soffit area, waterproofing and any leadwork required to be done by customer.
 6 x 60mm stainless steel dowels between all column and portico head units.
 Avoid steel when drilling for any roof structure.
 All loose fixings, re-bar, re-bar loops and adhesive / resin to be supplied by the fixing contractor along with concrete for ring beam
 Re-bar loops to be fixed into course 'C' by fixing contractor - see notes on course 'C' drawing
 It is the responsibility of the customer to ensure the integrity of the building is suitable for the portico.
 These points only apply to Procter Cast Stone products

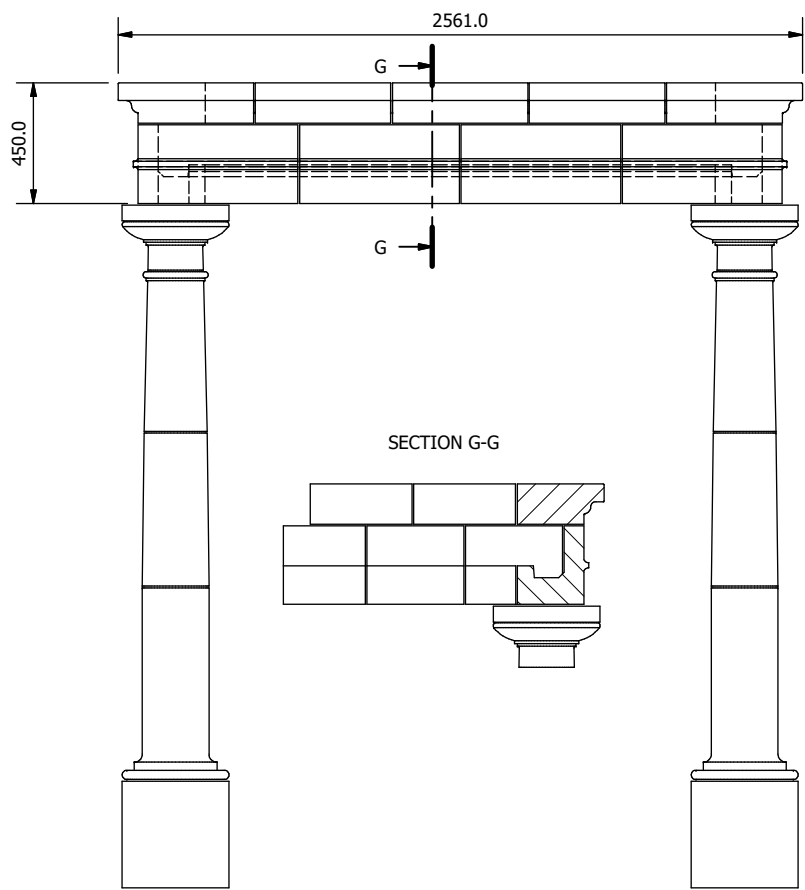

Designed by RR	Checked by	Approved by	Date	Date 24/04/2021	
PROCTER CAST STONE			Portico Elegant and Column Type A Assembly		Sheet 1 / 1
			Edition		